

6.5T
Max. Capacity


6028MM
Max. Platform Length

User friendly
Electrical Lock Release (E version)



6435B
(with an optional rolling jack)

OVERALL DIMENSION

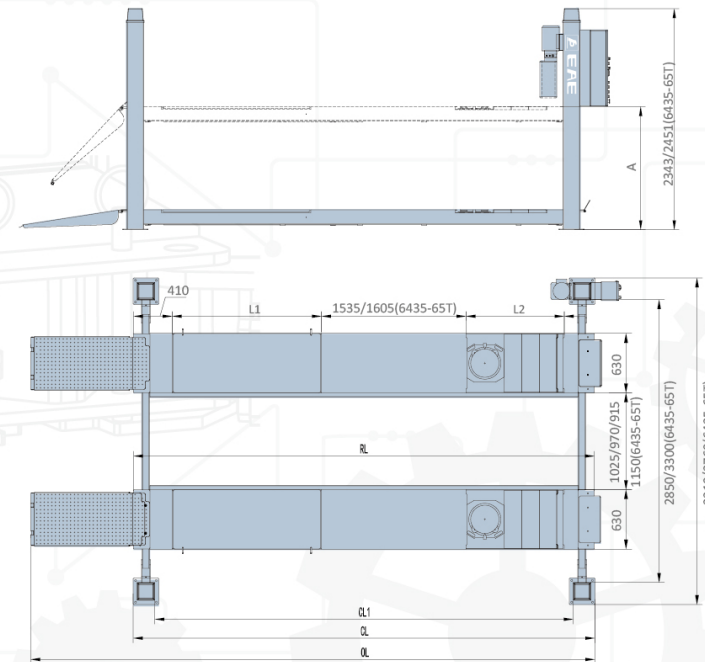

FOUR POST LIFT



6435S/B

FOUR POST LIFT

- Reliable mechanical safety locking system.
- Avoid rapid descending caused by leakages of hydraulic system by applying FLOW-CONTROL technique.
- The max. height switch limits the travel of runways and ensures cylinders work within the stroke.
- Protect against pinching and shearing using alarming buzzer in descending process.
- 24V safety control voltage.
- Reliable electrical release for easy and efficient use. (E version)
- Adjustable PD positions can accommodate different types of vehicle.
- Compact quick plug for electrical connection releases installers from too many wires and terminals and make initial installation much more efficient. Save more than 70% time on wire connection.
- Low profile runway is convenient for driving on and off and less demanding on space.
- The width between the platform can be ajust to 1150, 1025, 970, 915mm when installing.

- S Flat platforms
- B Platforms with front recesses and rear slip plates
- BPD Platforms with front recesses , play detector, and rear slip plates.



TECHNICAL DATA

Model No.	Lifting capacity	Max. lifting height(A)	L1	L2	RL	CL1	CL	OL
6435S-48L	4.0T/5.0T	180-1830	N/A	N/A	4880	4438	4888	5948
6435S-52L					5280	4838	5288	6348
6435S-57L	5.0T				5780	5338	5788	6848
6435B-48L	4.0T/5.0T	180-1830	1580	970	4880	4438	4888	5948
6435B-52L			1980	5280	4838	5288	6348	
6435B-57L	5.0T		2280	1170	5780	5338	5788	6848
6435BPD-48L	4.0T/5.0T	180-1830	1580	970	4880	4438	4888	5948
6435BPD-52L			1980	5280	4838	5288	6348	
6435BPD-57L	5.0T		2280	1170	5780	5338	5788	6848
6435S-65T	6.5T	225-1850	2280	1370	6000	5540	6028	7300
6435B-65T		265-1900						



Motor Housing

Oil Hose Protection

Optional Rolling Jacks

Solid and Robust Cable Pulleys